

4PMB

Four-Post Lift for Mercedes-Benz vehicles

**WIDEST
RUNWAYS!**



*Shown with optional swing air jacks,
AlignLights, and tumples.*

- ✓ **The only Mercedes-Benz approved alignment rack for Sprinter**
- ✓ **660 mm (26 in.) runway width**
- ✓ **8165 kg (18,000-lb.) capacity**
- ✓ **Patented features maximize productivity**



Specifications

| | |
|----------------------------------|--------------------------------|
| Max. vehicle weight | 8164 kg (18,000 lbs.) |
| Max. wheelbase | |
| General service | 4902 mm (193 in.) |
| Two-wheel alignment* | 4496 mm (177 in.) |
| Four-wheel alignment | 4496 mm (177 in.) |
| Min. four-wheel alignment | 2235 mm (88 in.) |
| Max. lifting height | 1905 mm (75 in.) |
| Alignment height | Any of 16 lock positions |
| Minimum height | 222 mm (8.75 in.) |
| Overall height | 2489 mm (98 in.) |
| Tread width | |
| Min. inside | 1016 mm (40 in.) |
| Max. outside | 2337 mm (92 in.) |
| Motor | 3 hp, 208-230 VAC, 60 Hz, 1 ph |
| Air | 6.2-10.3 bar (90-150 psi)** |
| Color | RAL 7015 |

* Long wheelbase vehicles may require jacking compensation
 ** 8.6 bar (125 psi) required for full jack capacity

Models

| | |
|---------------------|--|
| 4PMB-215E | Four-Post lift (3 hp, 208/230VAC, 1Ph, 50Hz) |
| 4PMB-216E | Four-Post lift (3 hp, 208/230VAC, 1Ph, 60Hz) |
| 4PMB-435E | Four-Post lift (5 hp, 208/230/400/460VAC, 3Ph, 50Hz) |
| 4PMB-PS-215E | Four-Post lift with PowerSlide™ rear slip plates (3 hp, 208/230VAC, 1Ph, 50Hz) |
| 4PMB-PS-216E | Four-Post lift with PowerSlide™ rear slip plates (3 hp, 208/230VAC, 1Ph, 60Hz) |
| 4PMB-PS-435E | Four-Post lift with PowerSlide™ rear slip plates (5 hp, 208/230/400/460VAC, 3Ph, 50Hz) |
| 4PMB-IS-215E | Four-Post lift with FIA, Inflation Station, and PowerSlide™ rear slip plates (3 hp, 208/230VAC, 1Ph, 50Hz) |
| 4PMB-IS-216E | Four-Post lift with FIA, Inflation Station, and PowerSlide™ rear slip plates (3 hp, 208/230VAC, 1Ph, 60Hz) |
| 4PMB-IS-435E | Four-Post lift with FIA, Inflation Station, and PowerSlide™ rear slip plates (5 hp, 208/230/400/460VAC, 3Ph, 50Hz) |

Options

| | |
|------------------|---|
| 20-2336-1 | Low-friction PowerSlide™ turnplates |
| 20-2113-1 | Low friction 50 mm turnplates (non-PowerSlide™) |
| 20-2993-1 | AlignLights system |
| 133-84-1 | 4082 kg (9,000-lb.) capacity Swing Air Jack |

| | |
|-------------------|---|
| 20-3146-1C | 1016 mm (40-in.) ramp extension kit (660mm (26-in.) wide) for extremely low clearance vehicles or high floor slope situation. Specify color code 014 when ordering. |
|-------------------|---|

4PMB-IS



FIA console controls PowerSlide® and Inflation Station features.

Integrated inflation reels automatically fills or bleeds each tire.

4PMB-PS



PowerSlide™ control, locks or unlocks the slipplates and turnplates by push-button.

PowerSlide™ front turnplates are optional.





Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and HawkEye are registered trademarks of Hunter Engineering Company.

0717EH

Copyright © 2017, Hunter Engineering Company

4PMB plan view

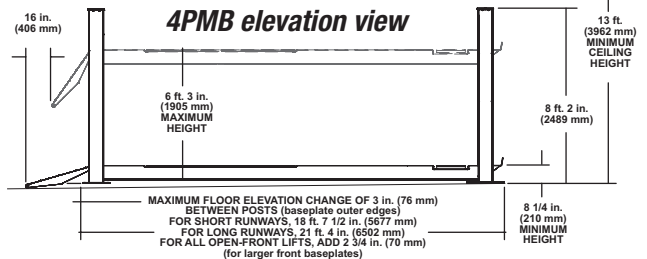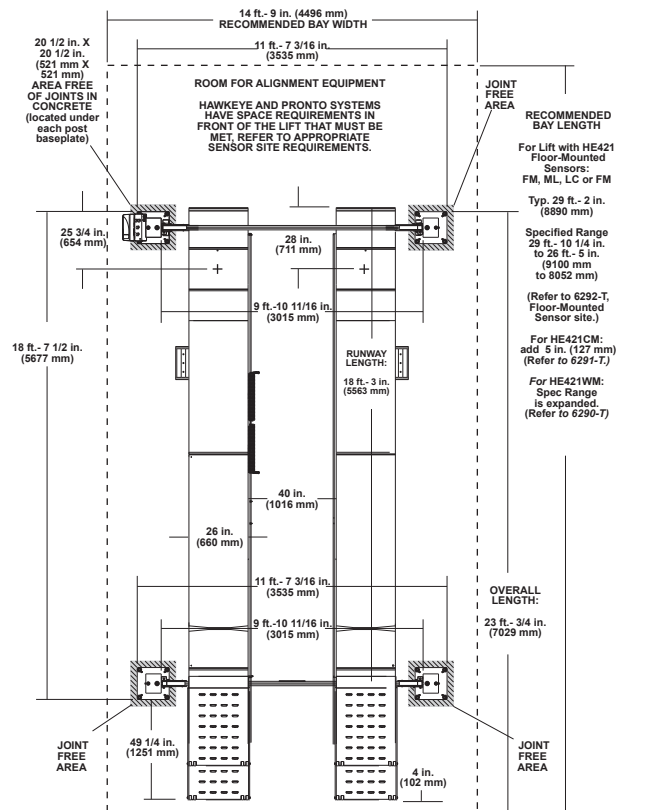

HUNTER
 Engineering Company

www.hunter.com

Form 6129-TE-05, 07/17
 Supersedes form 6129-TE-05, 06/17